

VERTICAL MACHINING CENTER
Compact, Durable, Powerful,
Strong and Accurate



**MEGA
TERA** SERIES

μ **MICRO**
DYNAMICS

Precision Performance

sales@microdynamicsusa.com
www.microdynamicsusa.com
www.microdynamicsfa.com



MD202404S.A.E

VERTICAL MACHINING CENTER

MEGA TERA SERIES



Micro Dynamics Vertical Machining Center Line opens a new era in multi-purpose and versatile machining centers. Compact, durable, powerful, strong and accurate, the **MEGA/TERA Series** starts a revolution in the market: the smallest C-frame machines provide powerful and precise results for manufacturers of dies and molds, aerospace, automotive, semi-conductor, job shops and general machine sectors.

The **MEGA/TERA Series** has been designed with the latest in technology being utilized throughout the machine with productivity in mind. From its EtherNet/IP architecture for easy automation and integration into systems and cells, to its Motion Control for fast and smooth operations used in all industries, the **MEGA/TERA Series** has quickly become one of the industries leading machine tool lines of Vertical Machining Centers.

POWERFUL

integrated Micro Dynamics®
Built-in Spindle.

THERMAL COMPENSATION

DYPEC® - Dynamic Predictive
Error Compensation.

COMPACT

design with small footprint.

COLLISION DETECTION

machine stops if a collision
is detected in all axis.

FAST

Mitsubishi CNC M830VW.

MICRO MILL®

G-code Generator

STRONG

FC300 Meehanite® casting.

RIGID TAP

up to 6,000 rpm.

RELIABLE

highest quality mechanical and
electrical components.

PC BASED HMI

allows user friendly functions.

INTEGRATED AUTOMATION

EtherNet/IP networked I/O.

15" TOUCHSCREEN

ergonomically friendly.

BUILT-IN SPINDLE

All Micro Dynamics spindles are built with all shelf standard bearings which can be replaced without removing the rotor. This makes all machines simple and fast to maintain. Rebuild costs are very low due to the availability of the parts and the short service time.

- Powerful integrated 40 taper dual contact spindle.
- Maintenance free 15,000 rpm ~18,000 rpm spindle requires no added oil or grease.
- ATE® motor integrated with hybrid ceramic angular contact bearings.
- Micro Dynamics drawbar has been rigorously tested to sustain more than 2 million cycles.
- For all applications, from heavy duty to high speed machining.
- Highest productivity under any conditions and complexities.
- CTS (Coolant Through Spindle) designed to sustain up to 100 bar (1,500 psi).^(*)


15,000 rpm

(40 Taper Dual Contact)



20,000 rpm (opt.)

(40 Taper Dual Contact)

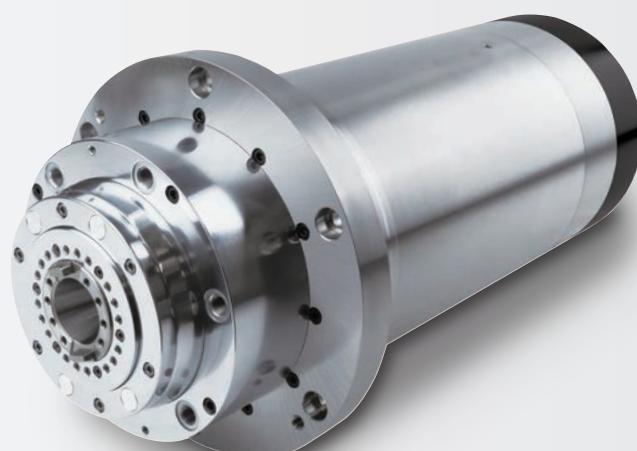


18,000 rpm (opt.)

(40 Taper Dual Contact)



Micro Dynamics optional 20,000 rpm spindle, available on all models, delivers 47 HP of power and 88 ft-lb of torque. This allows for fine finishes while still achieving high material removal rates in a wide range of material types.

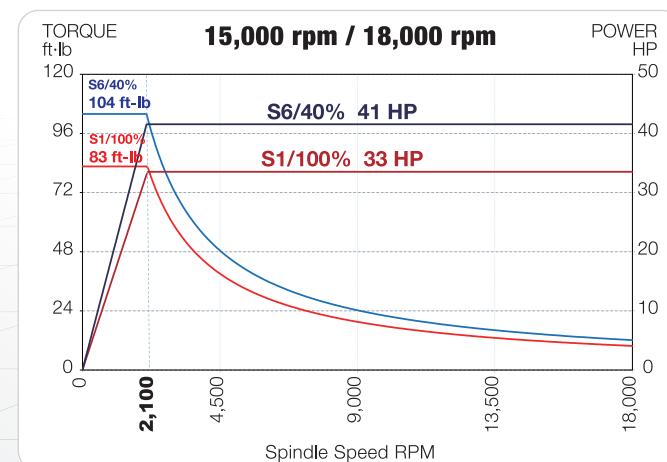


41 HP Power

1.5 sec Acc. 0 – 12K

104 ft-lb Torque

1.8 sec Dec. 12K – 0

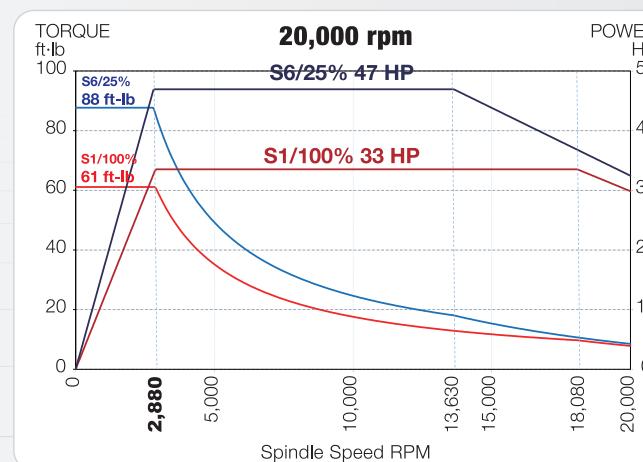

47 HP Power

1.5 sec Acc. 0 – 12K

88 ft-lb Torque

1.8 sec Dec. 12K – 0

(*) CTS preparation is standard equipment.
CTS system is optional.

The **MEGA/TERA Series** has been refined through years of research and development of new technologies that greatly enhance the machines for the rigors of the Mold and Die industry.

- Advanced Motion Control technology that benefits the production of Mold and Die components.
- Highest Quality components to ensure fast and smooth cutting strategies.
- 4G SSS (G05P20000) Motion Control processing speed of up to 540,000 blocks per minute.
- DYPEC® - Thermal Compensation. Real time thermal growth compensation, monitoring every few milliseconds, with 0.1 microns compensations to ensure accuracies during long cycle times.





AUTOMATIC TOOL CHANGER

The **MEGA/TERA Series** is equipped with a high-speed double arm tool changer with a 40-tool magazine^(*). The magazine is integrated on the machine with an isolated structure, eliminating vibrations to the column, thus improving accuracy and finishes. The multi speed double arm allows the operator to adjust the speed of the tool changes for oversized, heavy tools and probes, to ensure accuracy and reliability. The ATC recovery function in HMI is a standard feature that assists the operator in recovering the position of the arm and the tool.

(*) MEGA 30V standard is 30-tool magazine.

ATC SPEED:


1.2 sec Tool to Tool

2.5 sec Chip to Chip

Factory Conditions



ISOLATED STRUCTURE

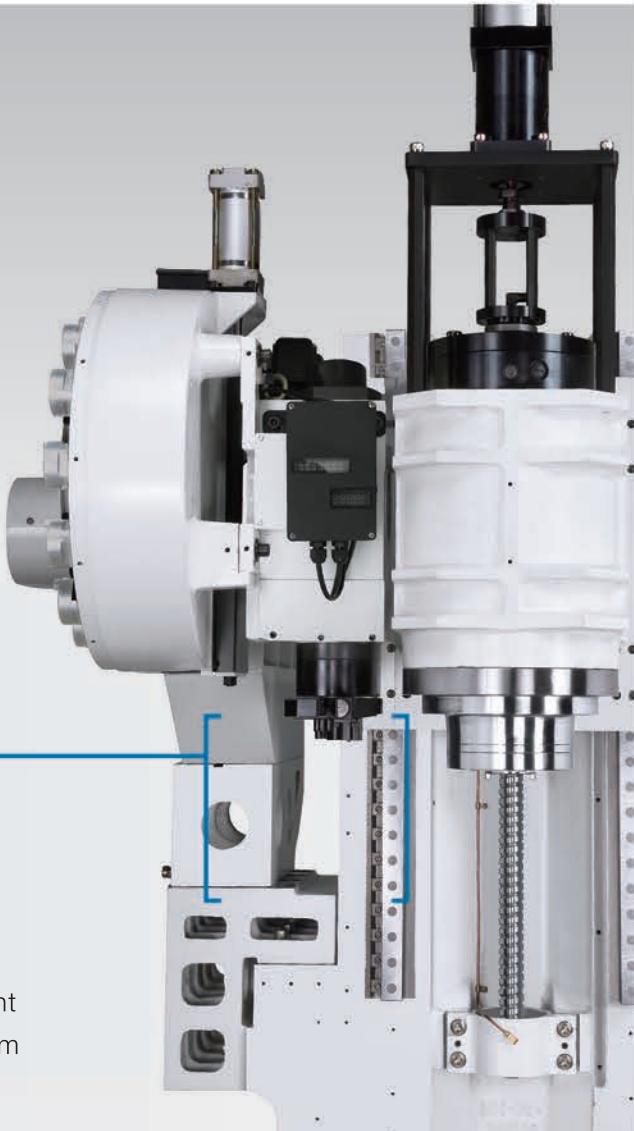

FULL COVER MAGAZINE

The tool magazine is protected from the machining environment reducing chips and coolant from entering the magazine area.



ATC REAR OPERATION PANEL^(*) and door allow access for loading, unloading and inspection of tools while the machine is in operation. Tools can be called up either by tool number or by pocket number. During manual operation the machine will continue the cycle without interruption until ATC door is closed and the key is switched to automatic.

(*) Except MEGA 30V.


CHIP MANAGEMENT SYSTEM



The chip management system includes base wash, dual augers and chip conveyor, virtually eliminating chip build-up. Coolant falls along the inside perimeter flushing chips down to the dual augers which evacuate chips to the front conveyor. All mounting hardware is bolted from the outside leaving a clean surface for chip evacuation.



Triple protection on linear guides and ball screws:
bottom cover, top cover
and telescopic cover.

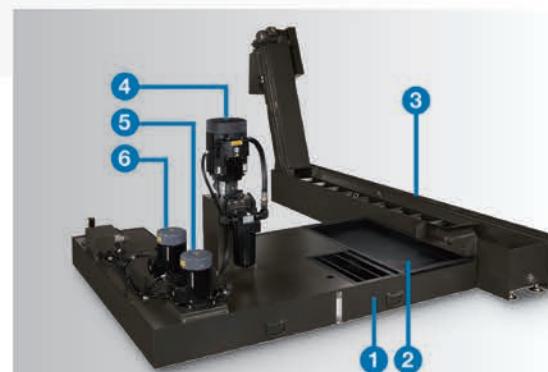

MODULAR COOLANT/CHIP SYSTEM

1. Filter Chip Basket
2. Filter Chip Pan
3. Chip Conveyor
4. CTS Pump Option
5. Base Wash Pump
6. Coolant Pump




REVERSIBLE CONVEYOR

standard in all MEGA/TERA Series.
Rear chip conveyor available under request.



ERGONOMICS

MEGA/TERA Series is ergonomically designed for operator and maintenance convenience. The large wide front door can be opened with one hand. There are three LED lights, two in the sides and one over the work area.

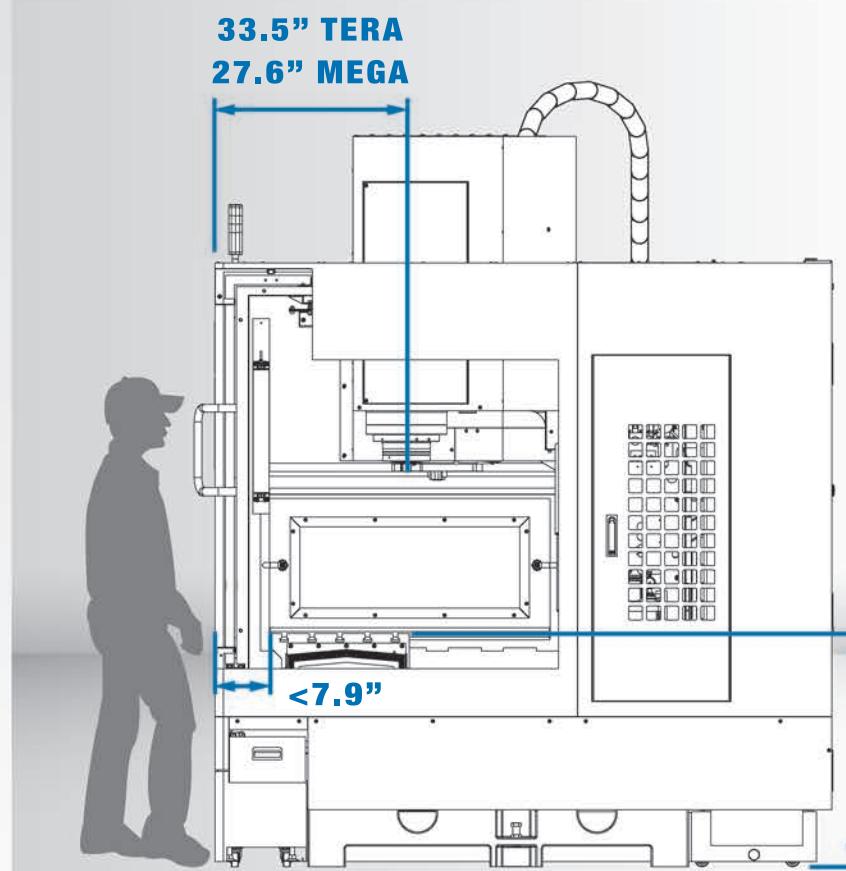

The distance from the door to the table is less than 7.9" for easy setup and part loading. The reach for operator access to the spindle is greatly reduced.



Two axes motion operator panel offers flat, tilting and swivel control.




Headstock service door to facilitate access is standard on all models.


**35" TERA
33" MEGA**
Refer to machine drawings for precise dimensions

DYPEC® THERMAL COMPENSATION


DYPEC®, **Dynamic Predictive Error Compensation**, corrects position error caused by thermal changes which improves accuracy and part finishes (resolution 0.1 µm).

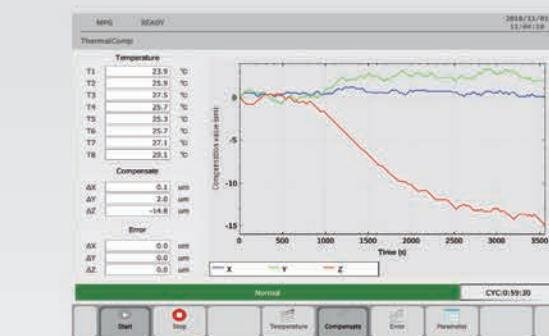


DYPEC® software chart in HMI

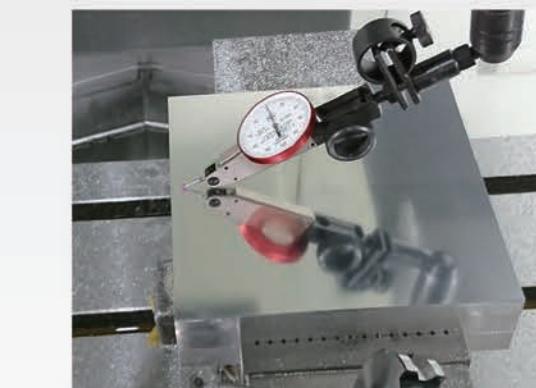

DYPEC® mirror milling with ball end mill

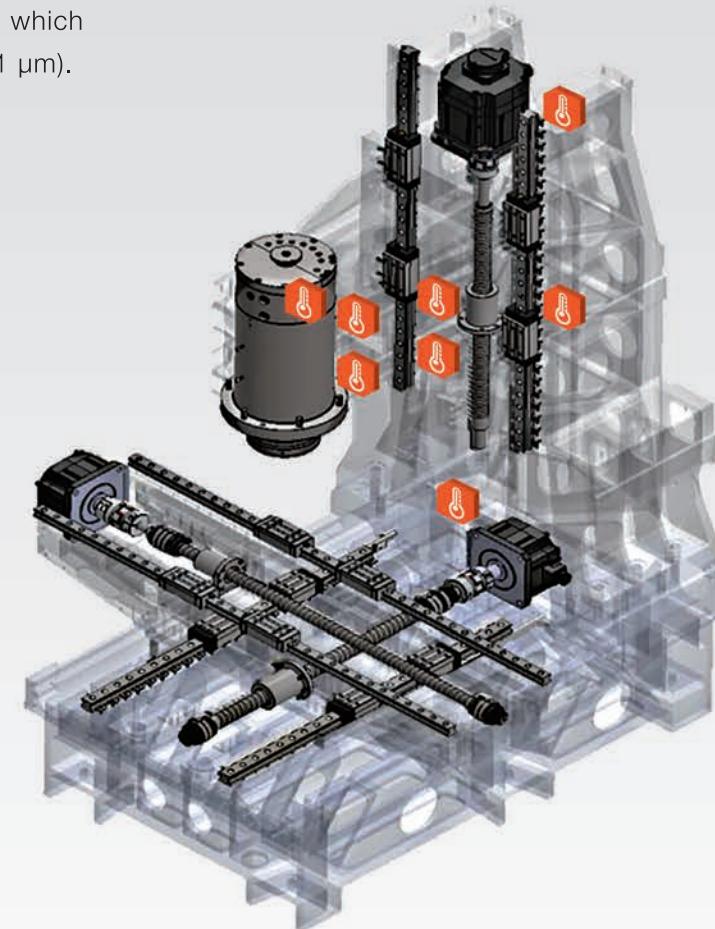

THERMAL SENSOR

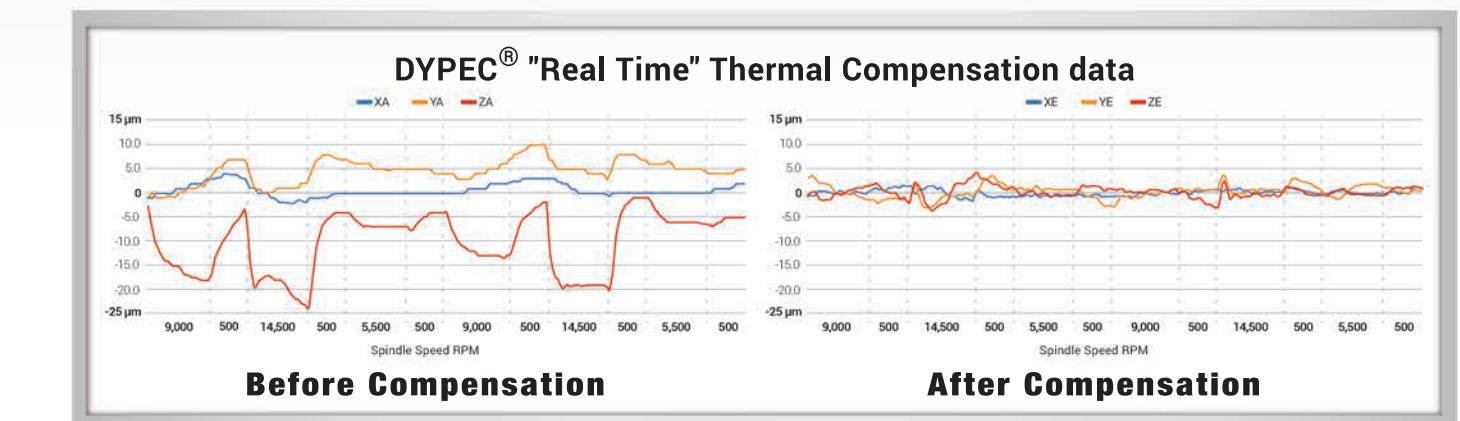


X/Y/Z axis static in micron error before and after DYPEC® compensation (48 hours test).




MICRO DYNAMICS® HMI

The Windows® embedded HMI CNC gives the user the ability to create or add apps to make it flexible to operate and automate the machine. Operator can load, run or edit any program from any device: internal HMI memory, PC hard drive or external USB device.

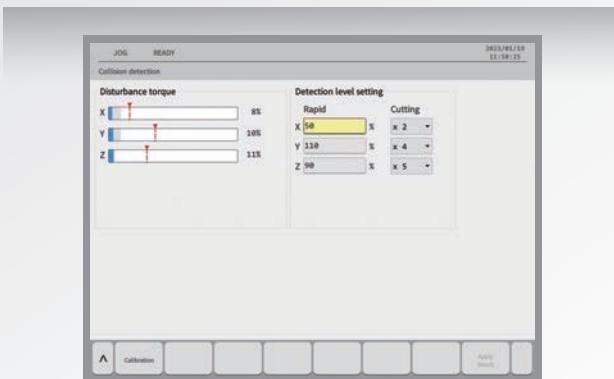

COLLISION DETECTION

Machine stops if a collision is detected in all axis.

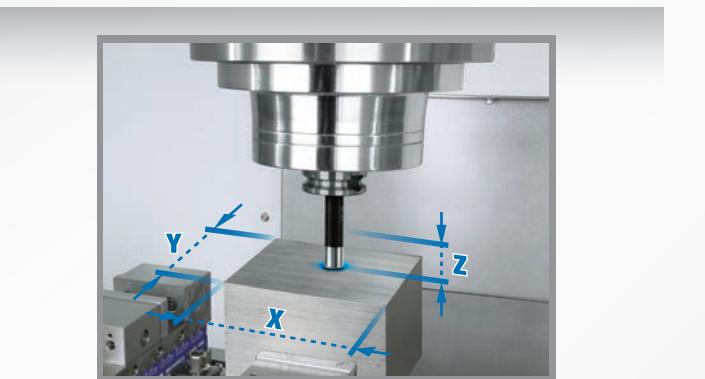


AUTO PART SETUP


X, Y, Z work offset can be achieved with a hard probe.



PART SETUP

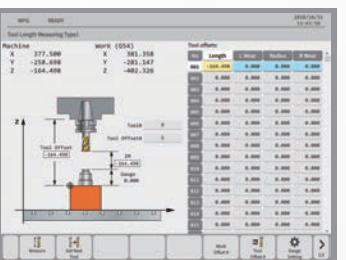

TOOL SETUP

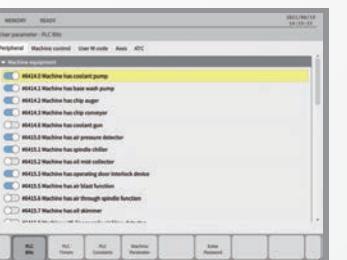


PARAMETER SETUP





Tool Offset
-164.498


The **MEGA/TERA Series** features Mitsubishi CNC M830VW Control which is well suited to high-speed, high-accuracy machining and multi-axis, multi-part system control. Mitsubishi's tool path graphics verification makes it easier for end users to check G-Code program before machining.

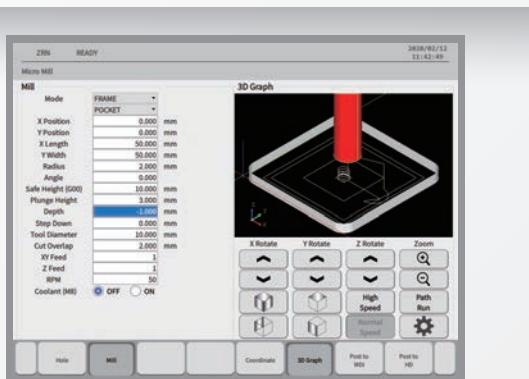


MICRO MILL® is an interface that allows any operator to easily perform milling and drilling operations while creating G-Code and post to MDI or main memory.

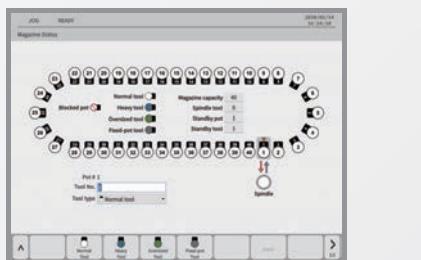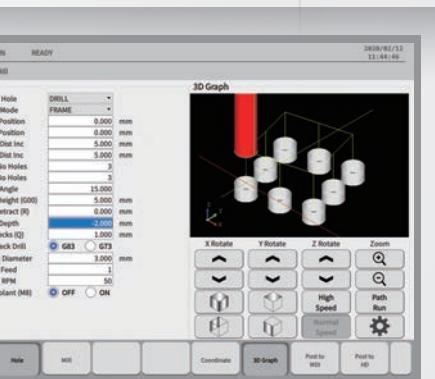

MAGAZINE MONITOR

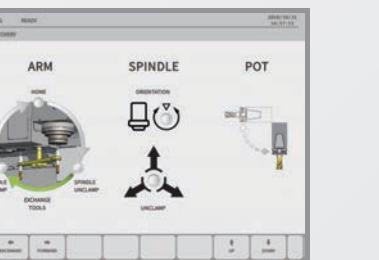

ATC RECOVERY function allows the operator to recover the tool changer.

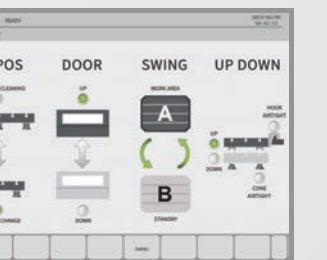

APC RECOVERY function allows the operator to recover the pallet changer.

Micro Dynamics® features:

- Mitsubishi CNC M830VW series.
- DXF import.
- Main and subprograms can be edited and run as one file.
- Helical interpolation.
- Workpiece position offset for rotary axis.
- 15" Touchscreen display.
- 54 Sets work offsets.
- Programs can be run from the front side USB or the hard drive.
- Tolerance control.
- 60 GB Data Server.
- 400 Sets tool life management.
- 8,000 Sets macro variable.
- Scaling.
- Inverse time feed.
- 1,000 Programs in editing memory.
- 64 Bit microprocessor.
- 3D circular interpolation.
- Spiral/conical interpolation.
- 999 Sets in tool compensation.
- 2,048 KB Program memory.
- G-Code guidance.
- Simple programming (NAVI mill conversational programming).
- Polar coordinate command.
- Upgradable to 5 axes simultaneous control.*

(* Optional for U.S. market only.)

MEGA 20VAPC



SERVO DRIVEN
PALLET CHANGER

Dual pallet changer MEGA 20VAPC is designed for high production. The servo driven pallet changer switches tables in 8.5 sec. With the APC recovery function in the HMI the operator can easily perform maintenance of the pallet changer.



Pressurized cones



MEGA 30VT / TERA 50VT


The MEGA 30VT and TERA 50VT are Micro Dynamics's five-axis trunnion (4+1) table machines with hydraulic brakes. The design allows the user to load three vises or can be used as a 20" x 11.8" work table with a 8.7" diameter face plate^(*) in MEGA 30VT and 28.3" x 15.8" work table with a 12.6" diameter face plate^(**) in TERA 50VT.

For automation the through hole of the rotary table allows for the plumbing of hydraulics, pneumatics or other devices. A true five-axis simultaneous version is available as an option.



MACHINE 6 SIDES IN ONE LOAD

- Left vise: cut dove tail.
- Central vise: 5-side machining.
- Right vise: finish dove tail.

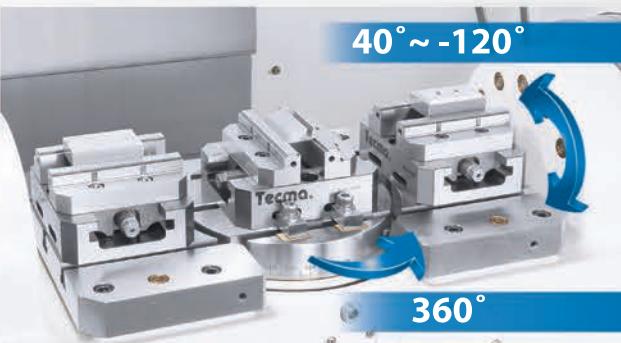

Titling axis and Rotary axis motion ranges.



^(*) MEGA 30VT: 12" and 14" diameter face table. (opt.)

^(**) TERA 50VT: 20" and 24" diameter face table. (opt.)

MACHINING CAPACITY




FACE MILL

MATERIAL REMOVAL:
46.7 cu in/min

SPINDLE LOAD:
87%

- Tool: **2.5" Face Mill**
- Material: 1050 Steel
- Cut: 2.00" x 0.24"
- Feedrate: 100 ipm
- Spindle Speed: 2,173 rpm

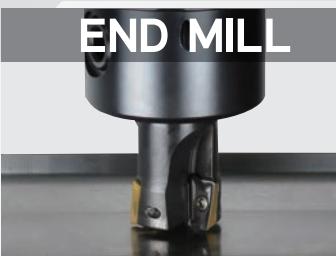

END MILL

MATERIAL REMOVAL:
22.5 cu in/min

SPINDLE LOAD:
47%

- Tool: **1.25" End Mill**
- Material: 1050 Steel
- Cut: 1.26" x 0.20"
- Feedrate: 91 ipm
- Spindle Speed: 3,800 rpm



DRILL

MATERIAL REMOVAL:
51 cu in/min

SPINDLE LOAD:
90%

- Tool: **1.75" Drill**
- Material: 1050 Steel
- Diameter Cut: 1.77"
- Cutting Depth: 1.38"
- Feedrate: 21 ipm
- Spindle Speed: 2,100 rpm



TAP

SPINDLE LOAD:
46%

- Tool: **1.25" x 7" Tap**
- Material: 1050 Steel
- Feedrate: 15 ipm
- Spindle Speed: 128 rpm

Factory Conditions




FACTORY TEST


Micro Dynamics standard factory tests for all models includes the circle, diamond, square cutting test, as well as milling, drilling, tapping and the heavy milling test based on below parameters:

- Tool: 2" End Mill
- Material: 1050 Steel
- Cutting Width: 0.9"
- Cutting Depth: 0.3"
- Feedrate: 28 ipm
- Spindle Speed: 1,100 rpm
- Load: 40%


ACCURACY

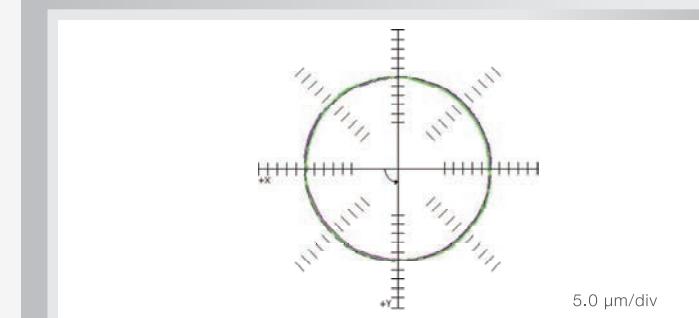

E.g. XY Double Ball Bar Test Results under 5 microns.

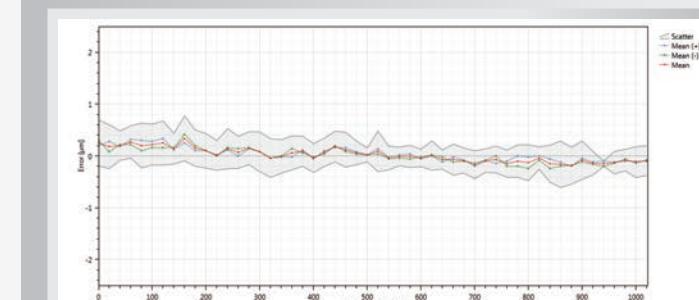

E.g. X Axis Laser Compensation under 5 microns.

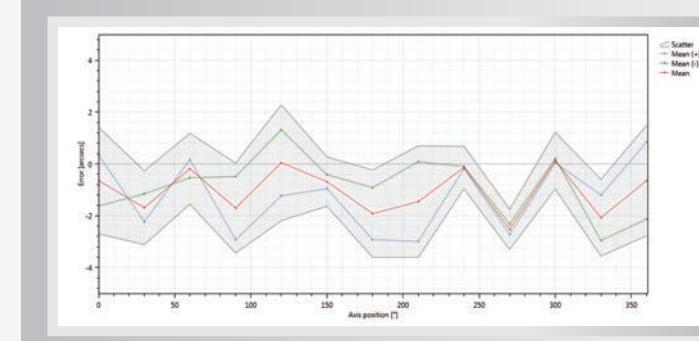

E.g. 5th Axis Laser Compensation under 10 arcsecs.

Micro Dynamics circle, diamond, square cutting test is done on all machines prior to shipment at 59 ipm with a maximum tolerance under 5 microns linear.

- XY, XZ and YZ Double Ball Bar Test Results at 59 ipm under 5 microns.
- X, Y and Z Axis Laser Compensation under 5 microns.
- 4th and 5th Axis Laser Compensation under ± 10 arcsecs.

16% Squareness	6.3 $\mu\text{m}/\text{m}$
16% Backlash X	$\leftarrow -0.3 \mu\text{m}$ $\rightarrow 0.9 \mu\text{m}$
13% Reversal spikes X	$\leftarrow -0.8 \mu\text{m}$ $\rightarrow -0.4 \mu\text{m}$
12% Cyclic error Y	$\uparrow 0.8 \mu\text{m}$ $\downarrow 0.7 \mu\text{m}$
10% Lateral play X	$\leftarrow 0.8 \mu\text{m}$ $\rightarrow 0.4 \mu\text{m}$
Circularity	2.7 μm

Factory Conditions

Linear X - Analysis features	VDI 3441
Name	Value (μm)
Maximum reversal (U max)	0.2
Maximum scatter (Ps max)	0.8
Positional uncertainty (P)	1.4
Positional deviation (Pa)	0.5
Mean reversal	0.1
Mean scatter (Ps mean)	0.5

Factory Conditions

Angular C - Analysis features	VDI 3441
Name	Value (arcsecs)
Maximum reversal (U max)	3.1
Maximum scatter (Ps max)	2.1
Positional uncertainty (P)	5.9
Positional deviation (Pa)	2.7
Mean reversal	1.5
Mean scatter (Ps mean)	1.5



Factory Conditions

MEGA 30V



MACHINE DIMENSIONS

Unit: mm (inch)





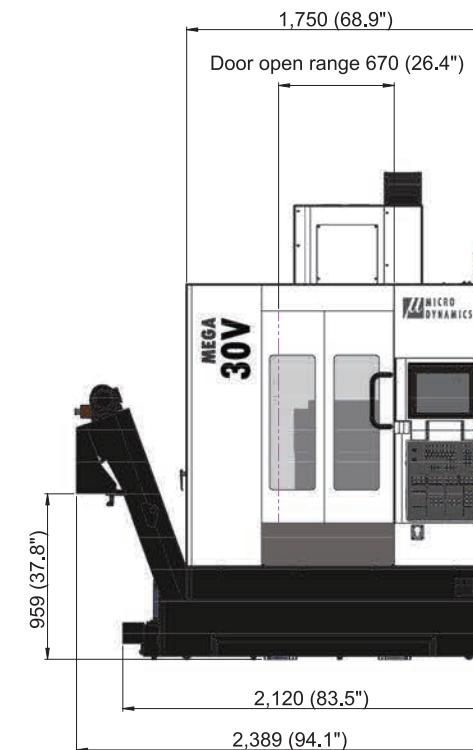
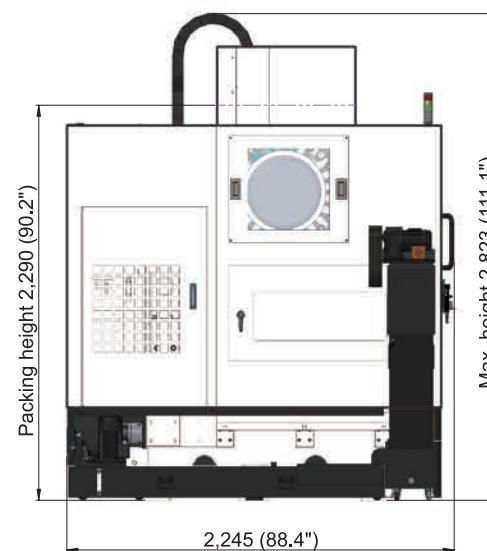


MEGA 40V



MACHINE DIMENSIONS





Unit: mm (inch)

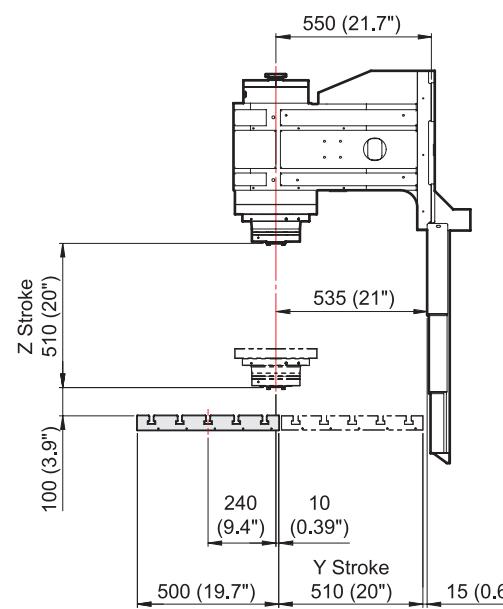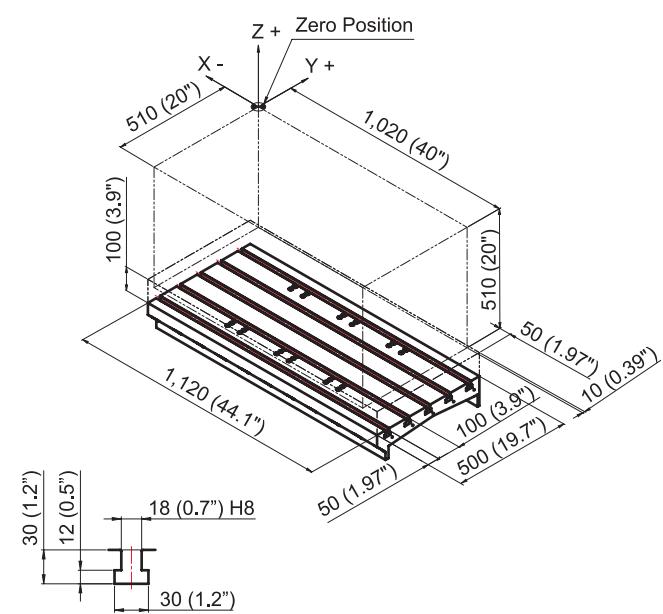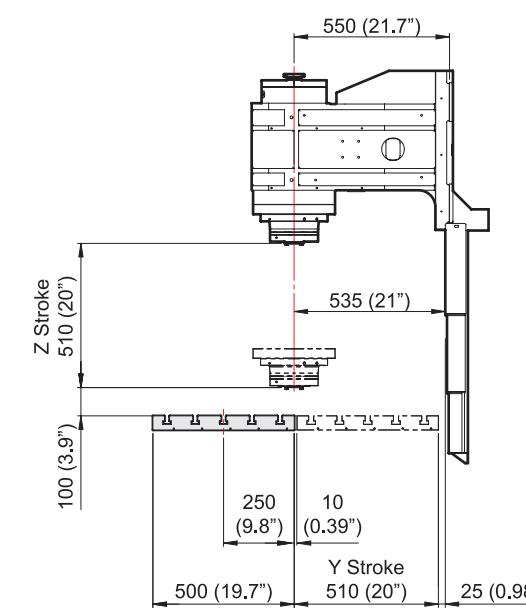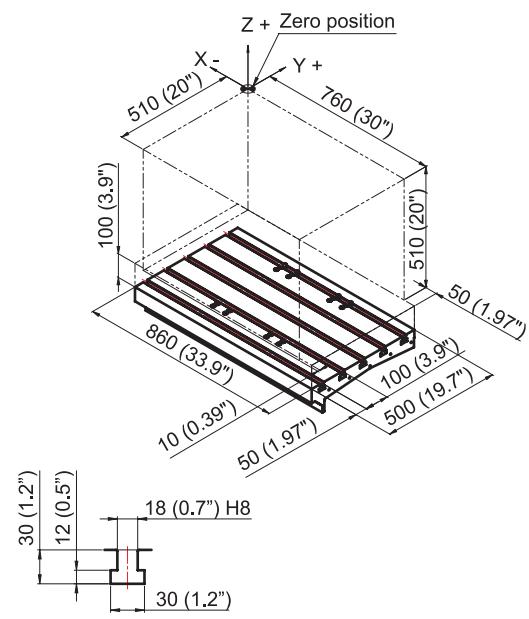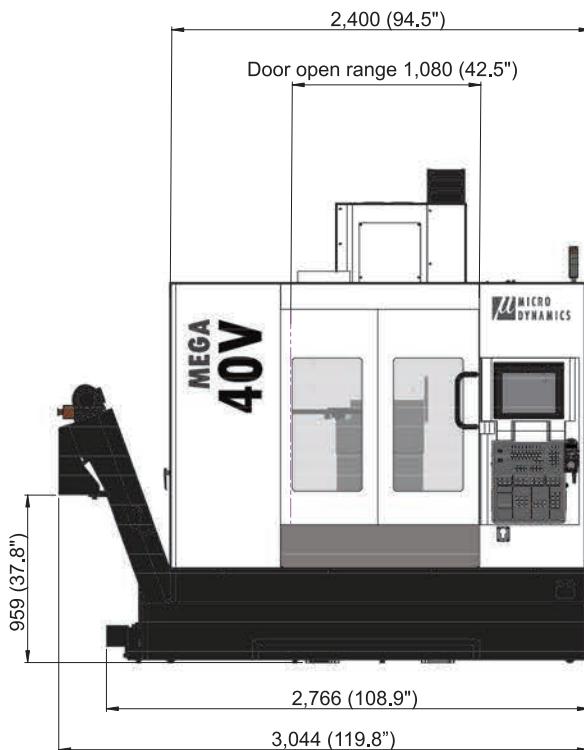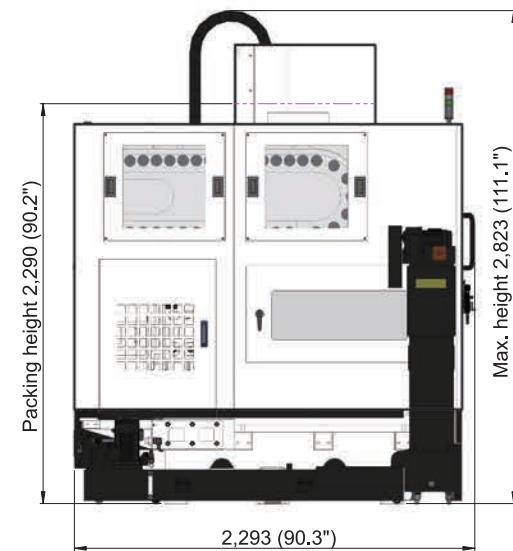

MEGA 20VAPC

MACHINE DIMENSIONS





Unit: mm (inch)

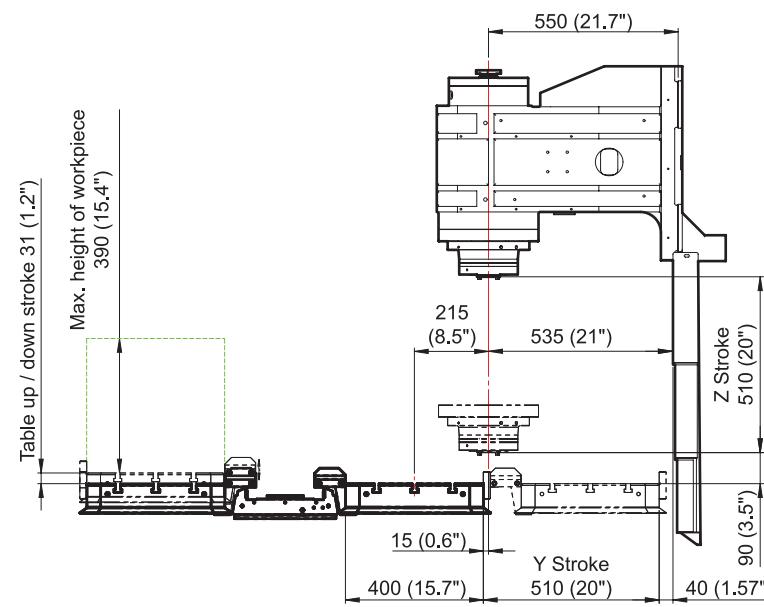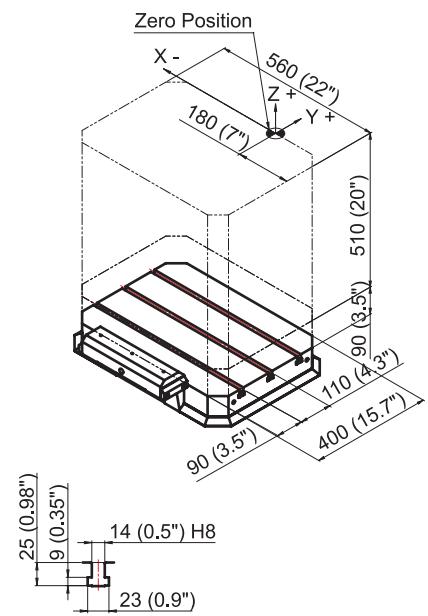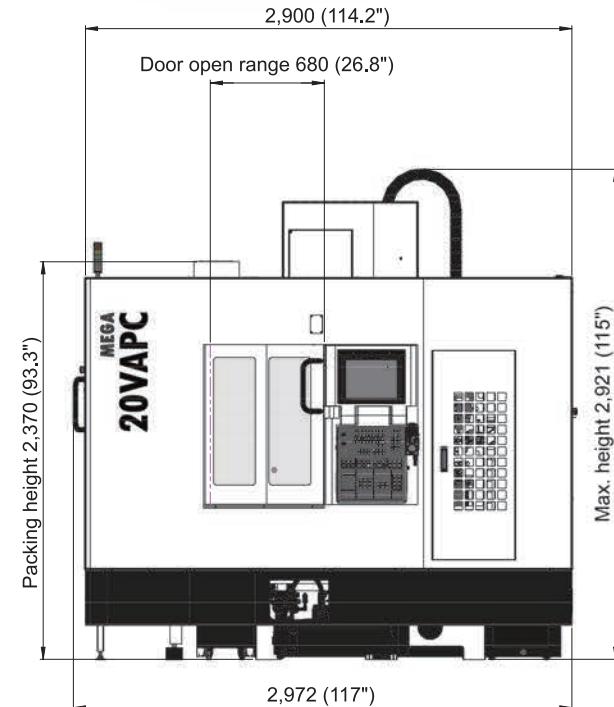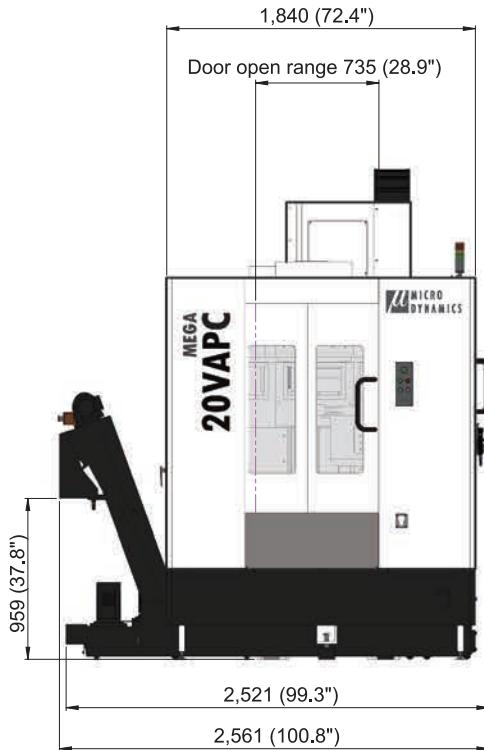

MEGA 30VT

MACHINE DIMENSIONS


Unit: mm (inch)

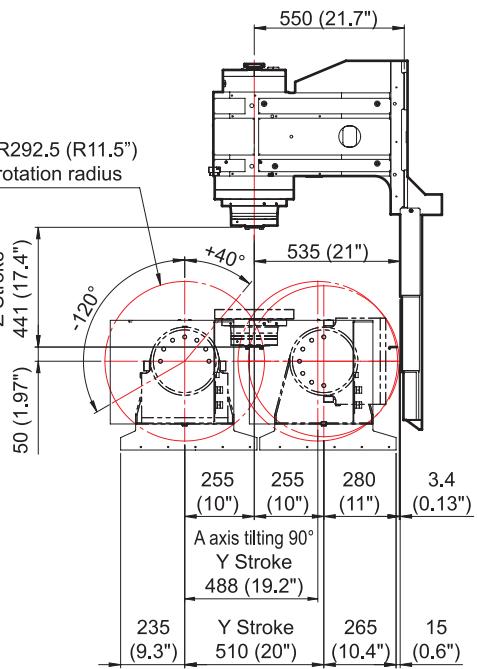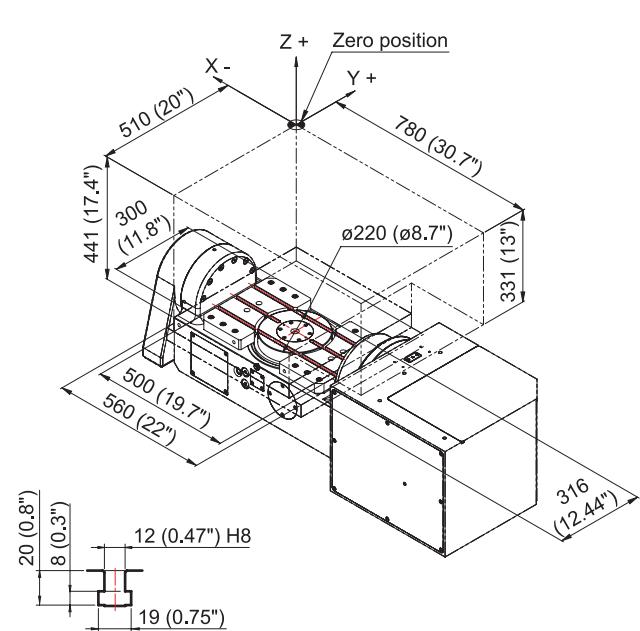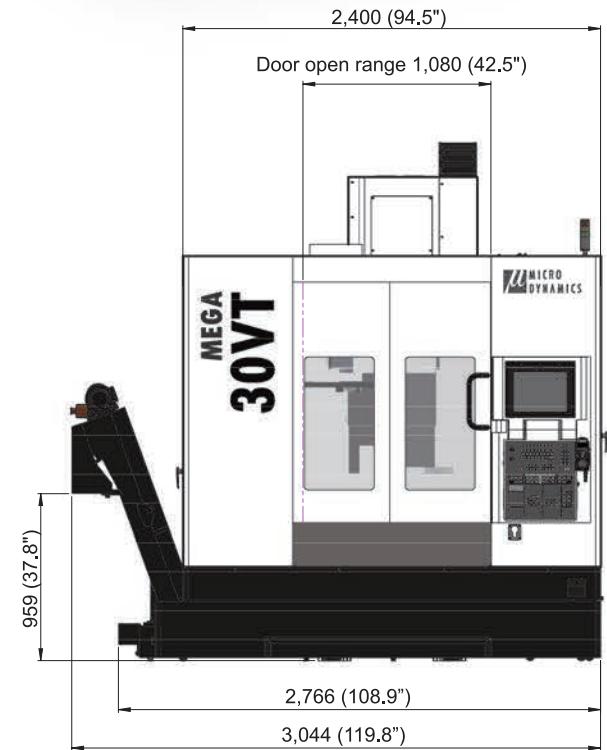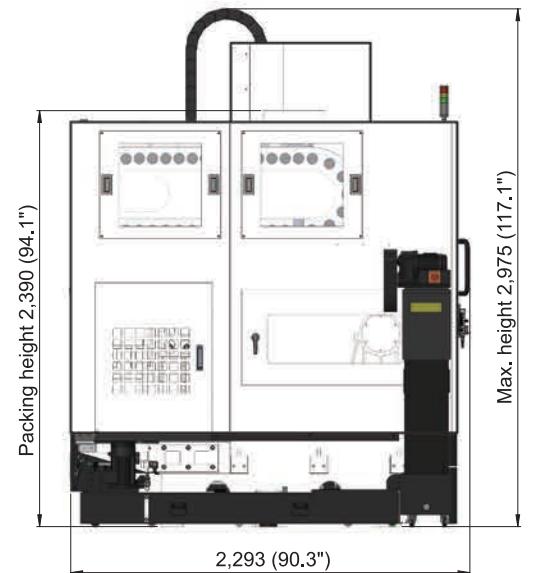

TERA 40V

MACHINE DIMENSIONS






Unit: mm (inch)

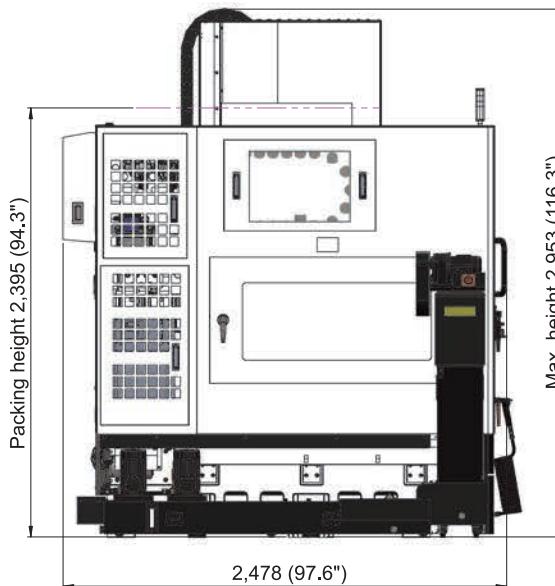

TERA 50V

MACHINE DIMENSIONS

Unit: mm (inch)

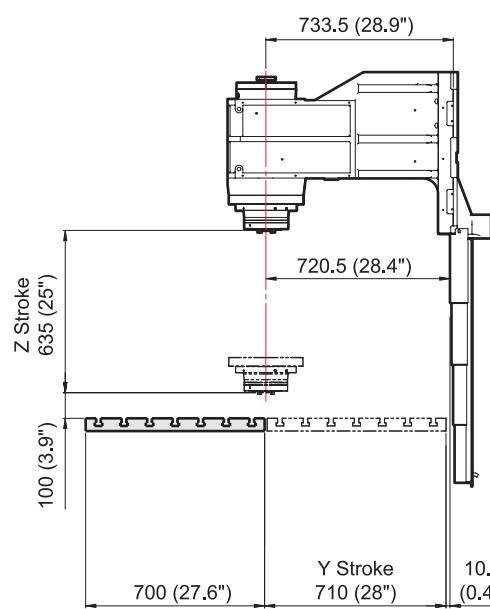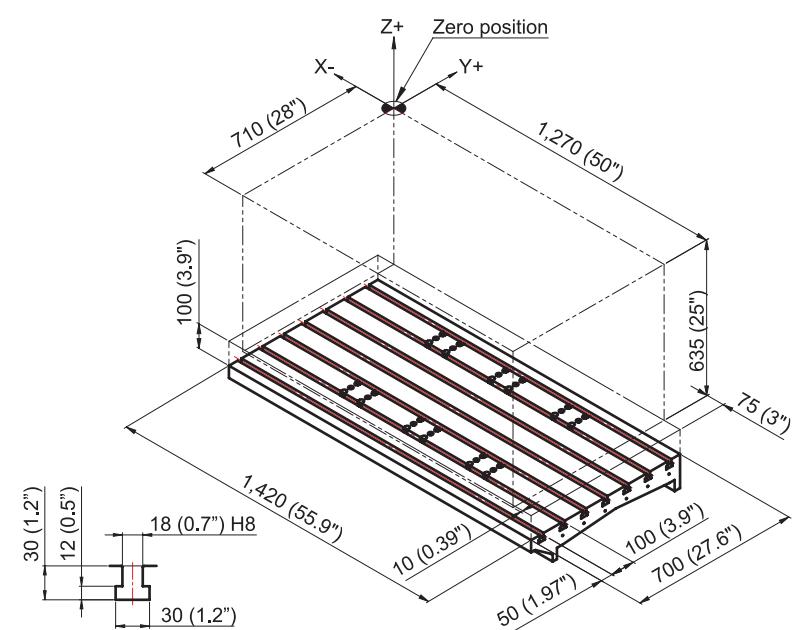
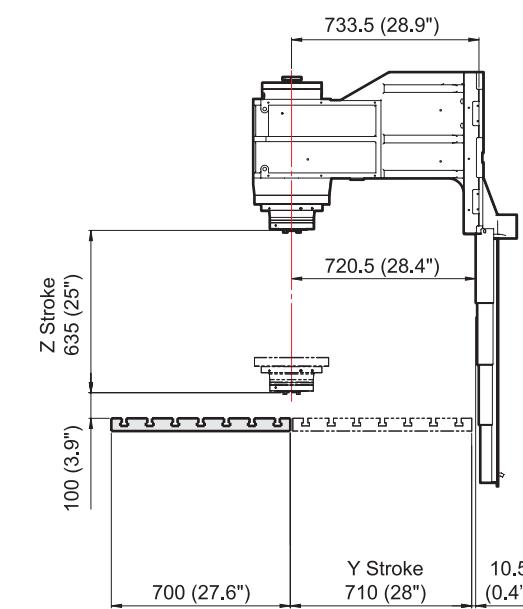
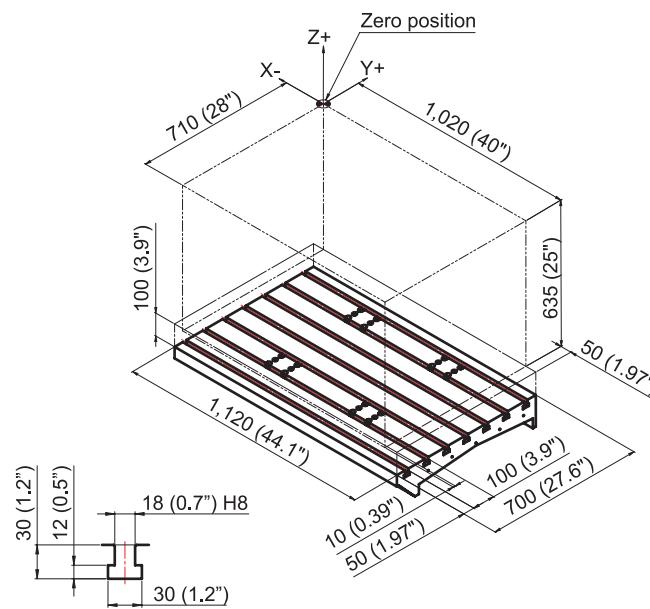
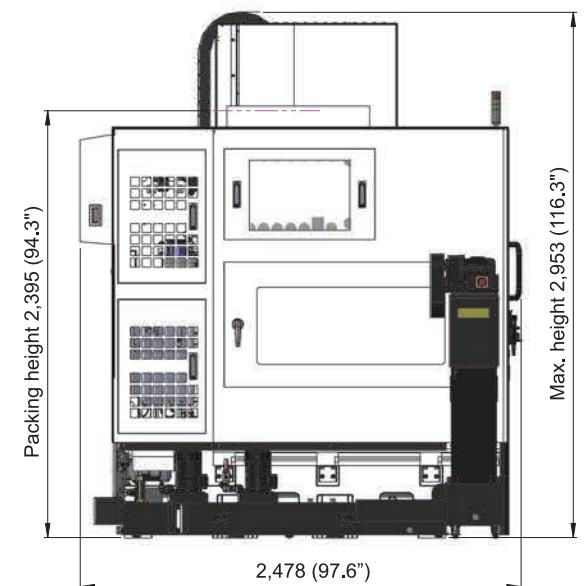


TERA 60V



MACHINE DIMENSIONS

Unit: mm (inch)

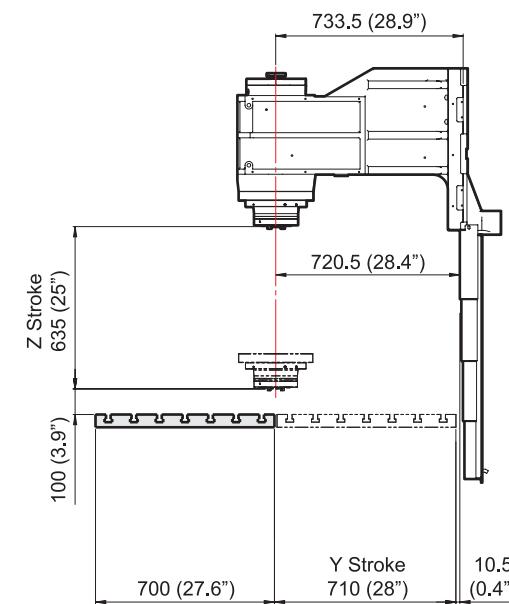
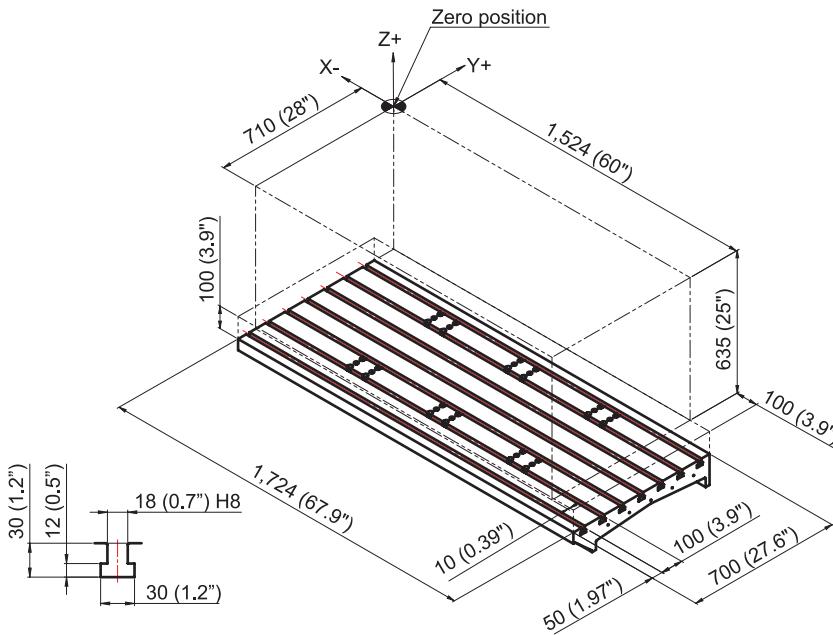
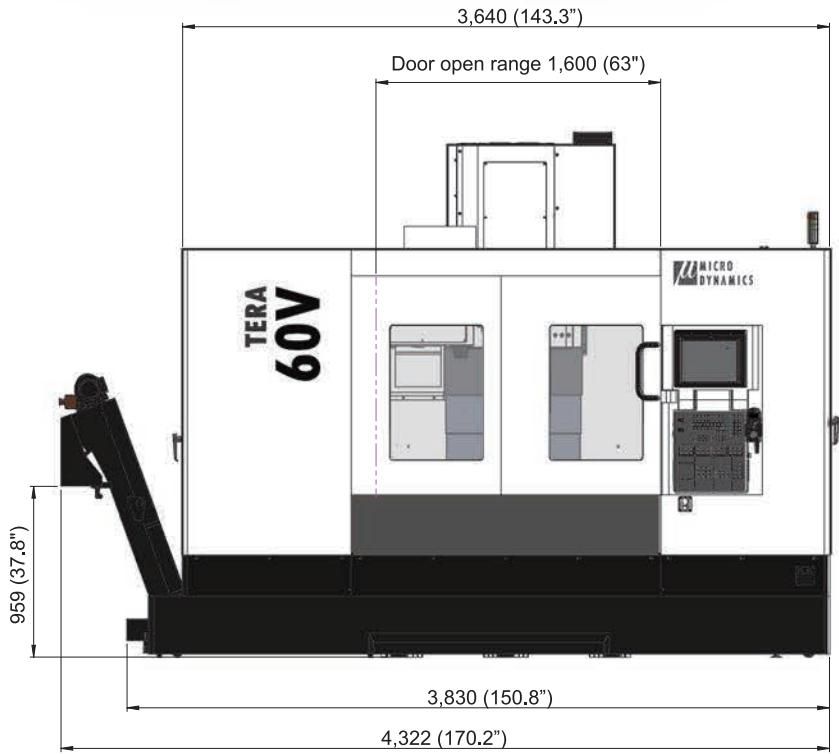
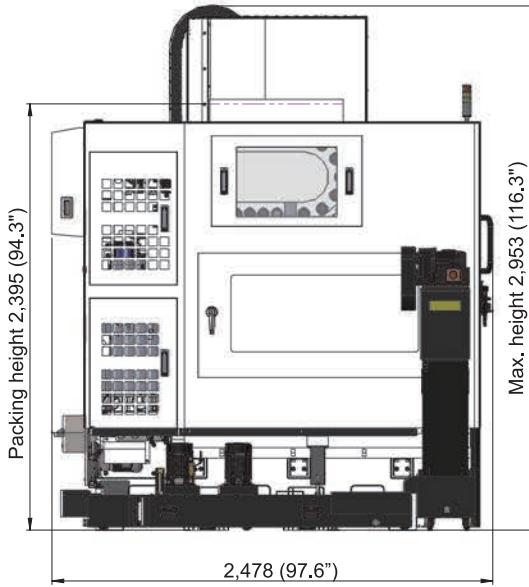


TERA 50VT



MACHINE DIMENSIONS

Unit: mm (inch)

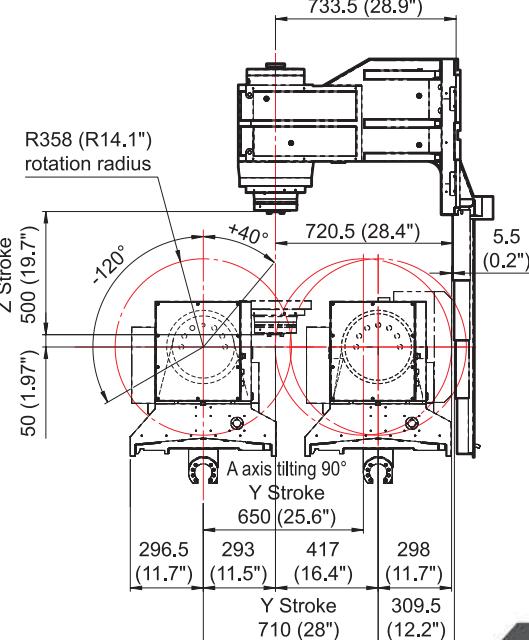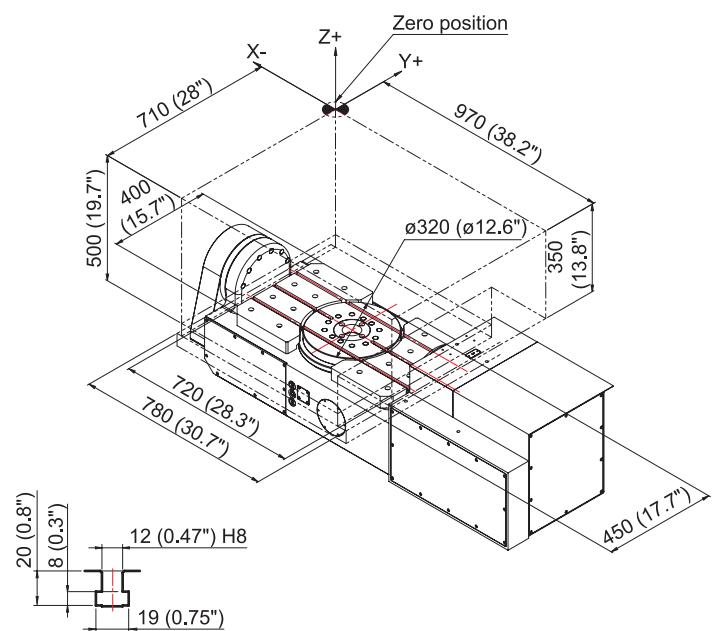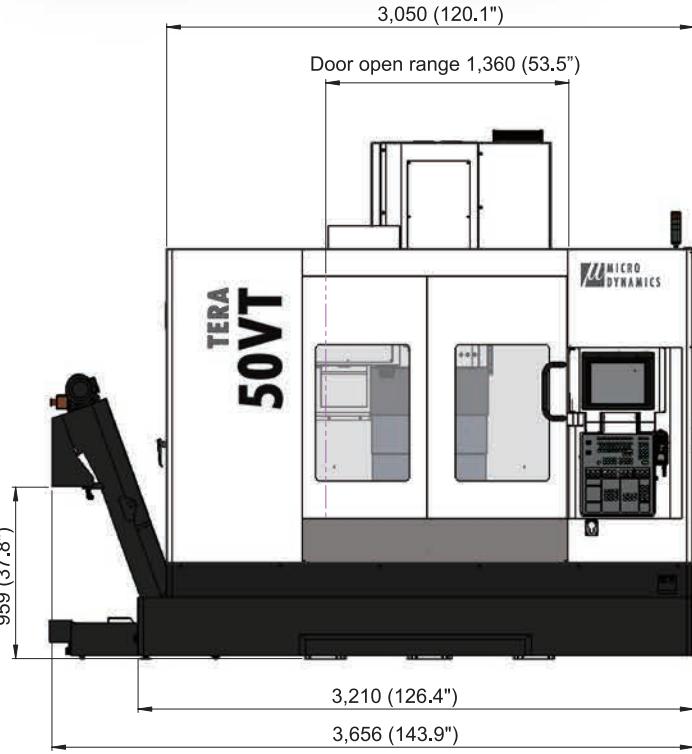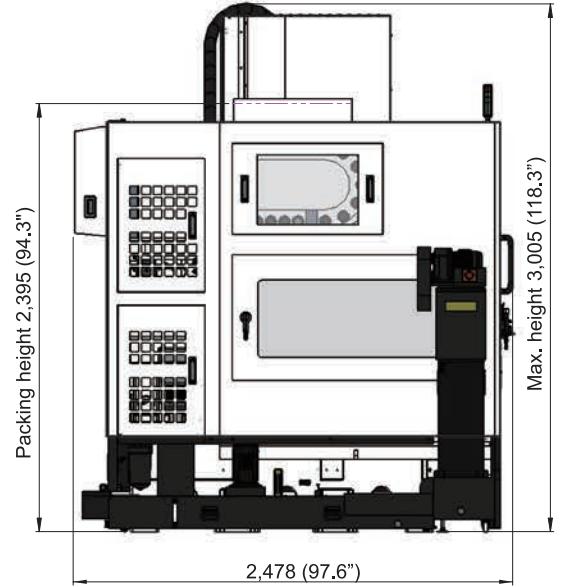



EQUIPMENT


● Standard ○ Optional

SERIES / MODELS	MEGA				TERA			
	30V	40V	20VAPC	30VT	40V	50V	60V	50VT
Spindle	15,000 rpm Built-in Spindle	●	●	●	●	●	●	●
	18,000 rpm Built-in Spindle	○	○	○	○	○	○	○
	20,000 rpm Built-in Spindle	○	○	○	○	○	○	○
Accuracy & Scales	DYPEC® Thermal Compensation	●	●	●	●	●	●	●
	X/Y/Z Axis Linear Scale	○	○	○	○	○	○	○
	A/C Axis Rotary Scale	-	-	-	○	-	-	○
Control & HMI	15" Touchscreen Display	●	●	●	●	●	●	●
	Micro Dynamics® HMI	●	●	●	●	●	●	●
	Tool Measurement / Workpiece Measurement	○	○	○	○	○	○	○
	8 M-Codes (M20 ~ M27)	●	●	●	●	●	●	●
	Additional 8 M-Codes (M130 ~ M137)	○	○	○	○	○	○	○
	Automatic Power Off	●	●	●	●	●	●	●
Tool Magazine	Tool Magazine Capacity - 30 (*)	●	-	-	-	-	-	-
	Tool Magazine Capacity - 40 (*)	-	●	●	●	●	●	●
	Servo Tool Magazine (*)	○	○	○	○	○	○	○
	ATC Auto Door (*)	○	○	○	○	○	○	○
	ATC Magazine Panel	-	●	●	●	●	●	●
	Tool Magazine LED	●	●	●	●	●	●	●
4th / 5th Axis	4th Axis Pre-wiring	○	○	○	○	○	○	○
	Metal Coolant Ring	○	○	○	○	○	○	○
	Spinning Window	○	○	○	○	○	○	○
	20-Bar (290 psi) / 40-Bar (580 psi) / 70-Bar (1,000 psi) CTS	○	○	○	○	○	○	○
	CTS Preparation (without Rotary Union)	●	●	●	●	●	●	●
Coolant & Chip Management	Coolant Gun & Air Gun	●	●	●	●	●	●	●
	Scraper Type Chip Conveyor	●	●	●	●	●	●	●
	Chain Type Chip Conveyor	○	○	○	○	○	○	○
	Drum Type Chip Conveyor	○	○	○	○	○	○	○
	Rear Type Chip Conveyor (*)	○	○	○	○	○	○	○
	Twin Chip Augers	●	●	●	●	●	●	●
	Disc Type Oil Skimmer	○	○	○	○	○	○	○
	Oil Mist Collector	○	○	○	○	○	○	○
Column Riser	MEGA series 100 / 150 / 250 mm (3.9" / 5.9" / 9.8") (**)	○	○	○	○	-	-	-
	TERA series 120 mm (4.7") (***)	-	-	-	-	○	○	○
Face Plate	300 / 350 mm (12" / 14") Diameter Face Table	-	-	-	○	-	-	-
	500 / 630 mm (20" / 24") Diameter Face Table	-	-	-	-	-	-	○
Safety & Power	CE-Conformity Package	○	○	○	○	○	○	○
Automation	Transformer	○	○	○	○	○	○	○
	Automatic Door (Pneumatic / Servo)	○	○	○	○	○	○	○
Others	Full Chip Enclosure	●	●	●	●	●	●	●
	Safety Door	●	●	●	●	●	●	●
	Manuals / Tool Kit / Foundation Kit	●	●	●	●	●	●	●

(*) Factory order (**) MEGA 20VAPC standard is 100 mm (3.9"), MEGA 30VT standard is 150 mm (5.9"). (***) TERA 50VT standard is 120 mm (4.7").

RETENTION KNOB

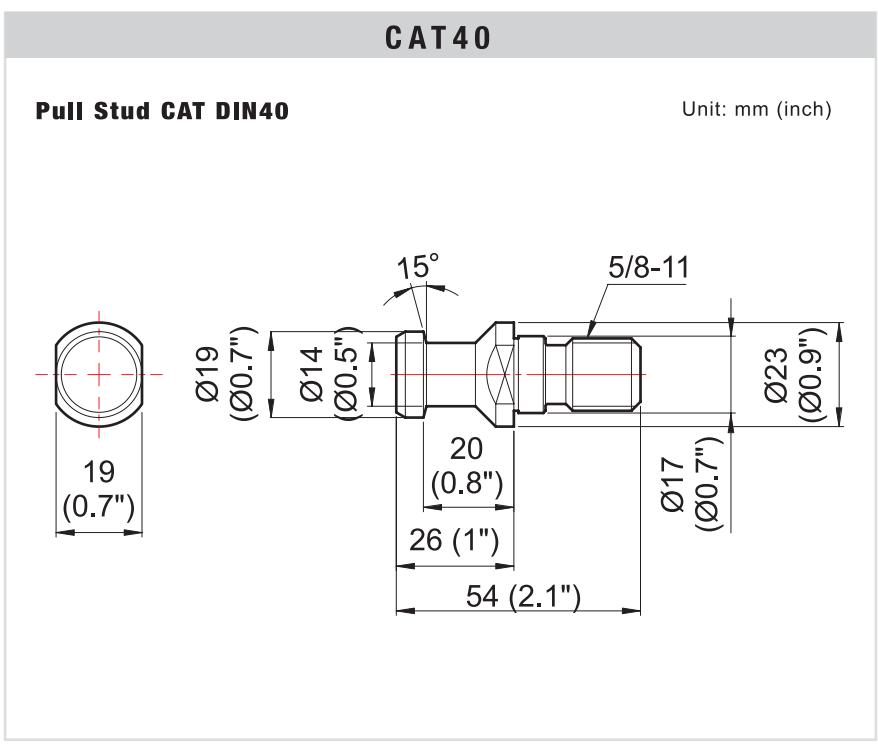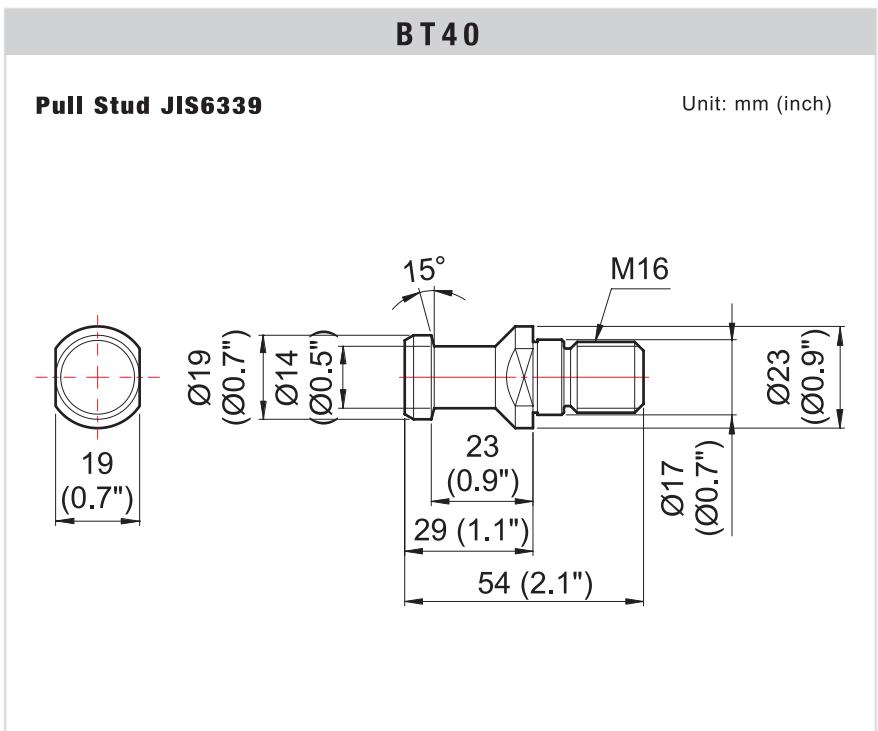

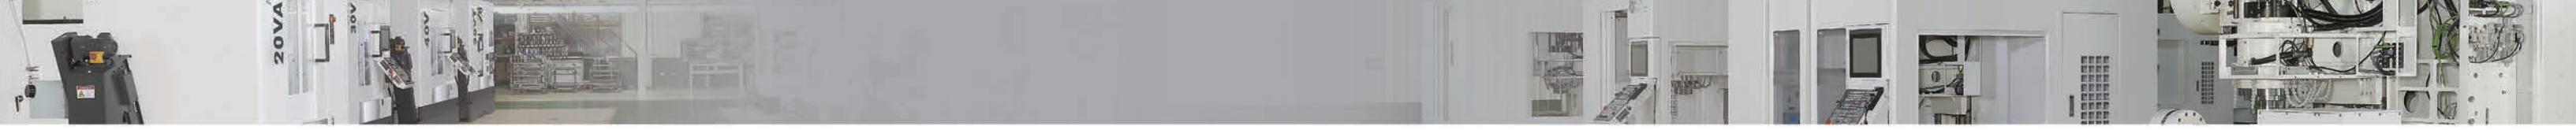

SPECIFICATIONS

ITEM	UNIT	MEGA 30V	MEGA 40V	MEGA 20VAPC	MEGA 30VT	TERA 40V	TERA 50V	TERA 60V	TERA 50VT										
TRAVEL	X Axis	inch	30"	40"	24"	30"	40"	50"	60"	38"									
	Y Axis	inch	20"	20"	20"	20"	28"	28"	28"	28" / 25.4" (90°)									
	Z Axis	inch	20"	20"	20"	17.4"	25"	25"	25"	19.7"									
	A Axis (Tilting Axis)	deg	N/A		40° ~ -120°		N/A		40° ~ -120°										
	C Axis (Rotary Axis)	deg	N/A		360°		N/A		360°										
TABLE	Spindle Nose to Table Surface	inch	3.9" ~ 24"	3.9" ~ 24"	3.5" ~ 23.6"	1.97" ~ 19.3"	3.9" ~ 29"	3.9" ~ 29"	3.9" ~ 29"	1.97" ~ 21.7"									
	Spindle Center to Column Front	inch	21.7"	21.7"	21.7"	21.7"	28.9"	28.9"	28.9"	28.9"									
	Table Size	inch	33.9" x 19.7"	44.1" x 19.7"	22" x 15.7"	08.7" (19.7" x 11.8")	44.1" x 27.6"	55.9" x 27.6"	67.9" x 27.6"	Ø12.6" (28.3" x 15.7")									
	Min. Table Index Unit	deg	N/A		0.001°		N/A		0.001°										
	Max. Table Load	lb	1,764	2,205	441 x 2	331 (0°~45°) / 187 (45°~90°)	3,307	3,307	4,409	551 (0°~45°) / 331 (45°~90°)									
SPINDLE	Table Height (from the Ground)	inch	33.1"	33.1"	37.4"	43.6"	35.4"	35.4"	35.4"	47.4"									
	Spindle Taper		40 Taper Dual Contact																
	I.D. of Spindle Bearing	inch	Ø2.75"																
	Spindle Speed	rpm	50 ~ 15,000 (optional 18,000 & 20,000)																
	Max. Power	hp	41																
FEEDRATE	Max. Cutting Torque	ft-lbf	104																
	Max. Speed for Rigid Tapping	rpm	6,000																
	Rapid Feedrate - X Axis	ipm	2,047	2,047	2,047	1,889	2,047	2,047	2,047										
	Rapid Feedrate - Y Axis	ipm	2,047	2,047	2,047	1,889	2,047	2,047	2,047										
	Rapid Feedrate - Z Axis	ipm	1,889	1,889	1,889	1,889	1,889	1,889	1,889										
ATC	Rapid Feedrate - A (Tilting) Axis	rpm	N/A		25		N/A		33										
	Rapid Feedrate - C (Rotary) Axis	rpm	N/A		33		N/A		66										
	Cutting Feedrate	ipm	0 ~ 787																
	Magazine Capacity		30	40															
	Tool Selection		Bi-Direction / Random																
PERIPHERAL	Tool Shank Type		BT40 / CAT40																
	Pull Stud Type		JIS6339 / CAT DIN40																
	Max. Tool Diameter x Length	inch	Ø3" x 9.1"	Ø3" x 11.8"	Ø3" x 9.4"	Ø3" x 11.8"	Ø3" x 10.2"	Ø3" x 11.8"	Ø3" x 11.8"										
	Without Adjacent Tool	inch	Ø6"																
	Max. Tool Weight	lb	15.4																
POWER	Power Consumption (220V/3PH)	KVA	30		40		40		40										
	Pneumatic Supply	L/min (ANR)	300 (0.6MPa)																
	Cutting Coolant Pump Motor	hp	1.5																
	Base Wash Pump Motor	hp	1.5																
	CTS Pump Motor (Opt.)	hp	4																
COOLANT	Coolant Tank Capacity	gal	66	79	79	79	79	106	106	106									
	Foot Print Size (W x D)	inch	94.1" x 88.4"	119.8" x 90.3"	100.8" x 117"	119.8" x 90.3"	123.5" x 97.6"	142" x 97.6"	170.2" x 97.6"	143.9" x 97.6"									
	Machine Height (H)	inch	111.1"	111.1"	115"	117.1"	116.3"	116.3"	116.3"	118.3"									
	Packing Size (W x D x H)	inch	108.3" x 90.6" x 100.4"	129.9" x 90.9" x 100.4"	126" x 86.6" x 100.4"	129.9" x 90.9" x 100.4"	133.9" x 90.9" x 100.4"	161.4" x 90.9" x 100.4"	192.9" x 90.9" x 100.4"	133.9" x 90.6" x 100.4"									
	Machine Net Weight	lb	10,780	12,368	14,109	13,999	17,725	18,960	20,216	21,076									
GEARBOX	Machine Gross Weight	lb	11,177	12,897	14,793	14,528	18,254	19,599	21,076	21,848									
	Positioning Accuracy / Full Stroke	inch	0.0002" (VDI 3441)																
ACCURACY	Repeatability Accuracy	inch	0.0001" (VDI 3441)																

Note: Specifications subject to change without notice.